

Accessories for Millenium

Modbus RS485 Interface



Electrical Control & Protection > Millenium Controller > Modbus RS485 Interface

The Millenium is the latest product in Crouzet's Millenium series. This is a compact, networked, and communicative PLC. Its flexible deployment and extensive configuration options with various extensions make it suitable for a wide range of applications.

Accompanied by powerful, intuitive software, it will support you throughout your automation needs.

For more information about **Millenium**, please visit www.crouzet.com

Offer description

- › Modbus RTU client/server standard widely used in industry
- › Polarize or not your Modbus network according to your needs
- › The removable connector allows to unplug a product without cutting the network
- › Include End Of Line resistor
- › Direct connection with screw terminals without the need of external accessories

The Offer

MI485P	MI485
	
Modbus Interface RS485 P	Modbus Interface RS485

Selection guide

	Polrization inside	Part number
Type		
Modbus RS485 P Interface	Yes	MI485P
Modbus RS485 Interface	No	MI485

Specifications

	MI485P	MI485
Specific characteristics		
Color	Light Gray RAL 7035	
Material	Polycarbonate	
Terminal Type	Euro type terminal Wire Size 1 x 24 to 12 Screw tightening Torque : 0.4 N. m. (3.54 lb. in)	
General & environment characteristics		
Products certification	CE, cURus	
Conformity with the EMC directive (in accordance with 2014/30/EU)	▪ IEC/EN 61000-6-1 (Residential, commercial, and light-industrial environments) ▪ IEC/EN 61000-6-2 (Industrial) ▪ IEC/EN 61000-6-3 (Residential, commercial, and light-industrial environments) ▪ IEC/EN 61000-6-4 (Industrial)	
Operating temperature	-20 °C → +55 °C (-4 °F → 131 °F)	
Storage temperature	-30 °C → +70 °C (-22 °F → 158 °F)	
Relative humidity	10-95%, non-condensing	
Maximum utilization altitude	Operation: 2000 m Transport: 3000 m	
Pollution	Degree: 2 in accordance with IEC/EN 61131-2	
Resistance to electrostatic discharge	Immunity to ESD IEC/EN 61000-4-2, level 3	
Resistance to HF interference (Immunity)	▪ Immunity to radiated electrostatic fields IEC/EN 61000-4-3, level 3 ▪ Immunity to fast transients (burst immunity) IEC/EN 61000-4-4, level 3 ▪ Immunity to shock waves IEC/EN 61000-4-5 ▪ Radio frequency in common mode IEC/EN 61000-4-6, level 3	
Conducted and radiated emissions	Class B	
Protocol Supported	Modbus Server or Modbus Client (FBD only)	
Hardware compatibility	Any Millenium bases MX*****ET MX*****	
Max. absorbed power	0.5W	
Enclosure Protection rating (in accordance with IEC/EN 60529)	IP 30	
Type	2 wires	
Line Termination	Internal, connectable by wiring	
Line Polarization	Included	Not Included
Transmission mode	RTU 8 bits ASCII 7 bits	
Parity	None, even, odd	
Stop bit	1 or 2	
Transmission rate	1200, 2400, 4800, 9600, 19200, 38400, 57600 bauds	
Addressing	From 1 to 247	
Compatible connector (included with the interface)	Euro type terminal 1 x 12 to 24 AWG	


WARNING - The technical information contained herein is for informational purposes only and does not constitute a contractual commitment or a guarantee of performance or fitness for any particular purpose. Crouzet and its subsidiaries reserve the right to make any changes without notice. It is essential to consult us regarding any specific use or application of our products, and it is the purchaser's responsibility to verify, in particular through appropriate testing, that the product is suitable for the intended use. Under no circumstances shall our warranty apply, nor shall we be held liable, for any use of our products – including, but not limited to, any modification, addition, or use in combination with other electrical or electronic components, circuits, mounting systems, or any other unsuitable equipment or substance – that has not been expressly approved by us prior to the conclusion of the sale. The applicable contractual terms and conditions are exclusively those set out in the Crouzet proposal accepted by the customer and in the current general terms and conditions of sale.

© Crouzet - 05/2026 - All rights reserved - Registered office: 10 rue Docteur Henri Abel 26000 Valence (France) - RCS Romans 663 820 413 - Capital €29,110,000 - crouzet.com - Registered trademark. Any reproduction, representation or distribution, even in part, is prohibited without prior written permission..

Dimensions

Front and Side

Modbus RS485 & RS485P Interface

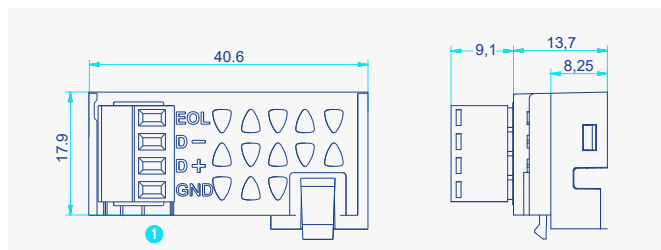

1 Connection terminals

WARNING - The technical information contained herein is for informational purposes only and does not constitute a contractual commitment or a guarantee of performance or fitness for any particular purpose. Crouzet and its subsidiaries reserve the right to make any changes without notice. It is essential to consult us regarding any specific use or application of our products, and it is the purchaser's responsibility to verify, in particular through appropriate testing, that the product is suitable for the intended use. Under no circumstances shall our warranty apply, nor shall we be held liable, for any use of our products – including, but not limited to, any modification, addition, or use in combination with other electrical or electronic components, circuits, mounting systems, or any other unsuitable equipment or substance – that has not been expressly approved by us prior to the conclusion of the sale. The applicable contractual terms and conditions are exclusively those set out in the Crouzet proposal accepted by the customer and in the current general terms and conditions of sale.

© Crouzet - 05/2026 - All rights reserved - Registered office: 10 rue Docteur Henri Abel 26000 Valence (France) - RCS Romans 663 820 413 - Capital €29,110,000 - crouzet.com - Registered trademark. Any reproduction, representation or distribution, even in part, is prohibited without prior written permission..