

REPORT

12 SERIES Time switches



Digital weekly astro time switch with Bluetooth Type 12.C1.8.230.B000

Simple but effective.

- 17.5 mm wide
- Without display
- Without Internal battery, one week power reserve
- Programming via App Finder Toolbox
- Bluetooth
- External switching push-button
- Synchronization via external wireless GPS antenna (Type 012.BG.8.230)



Toolbox

Download





Digital weekly astro time switch with Bluetooth Type 12.C1.8.230.B000

- Programming via **Smartphone - Android and Apple - with Bluetooth**
- 1 NO (SPDT-NO) 10 A
- Summer/Winter European, USA, Australian, Brazilian time, or specific coordinates
- Lock with a 4-digit PIN
- **Supercapacitor with one week power reserve**
- The functions that can be set from the app Finder Toolbox:
Time, astro, night switch off management, Pulse, Astro Pulse
- Protective separation between supply and contacts
- 17.5 mm wide
- 35 mm rail (EN 60715) mount



Holiday
program




Astro, time,
pulse and astro
pulse functions




One week
power reserve



External
switching
push-button

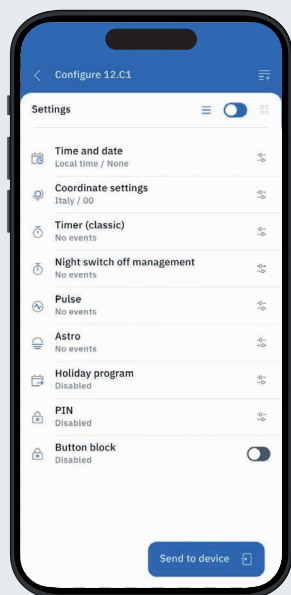

Toolbox

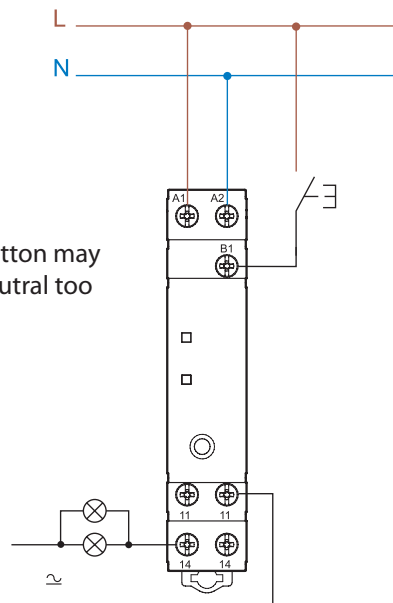

Type 12.C1.8.230.B000



Bluetooth GPS Antenna
Type 012.BG.8.230

- Plug'n'play
- Power supply 110...230 V AC
- Outdoor mounting (IP 54)
- GPS and Bluetooth 5 Long Range
- Synchronizes the date and time of the Type 12.C1 time switch daily
- No limit to number of synchronizable 12.C1 time switches